

GRADER BLADE



**Models 1000, 1000RS,
1200, 1200RS**


**Grader Blade available in
Straight or Rear Steer models**



Direct response system on raise and lower cylinder instead of old style double knuckle system.

Straight axel for models 1000 and 1200.

10 ply tires.

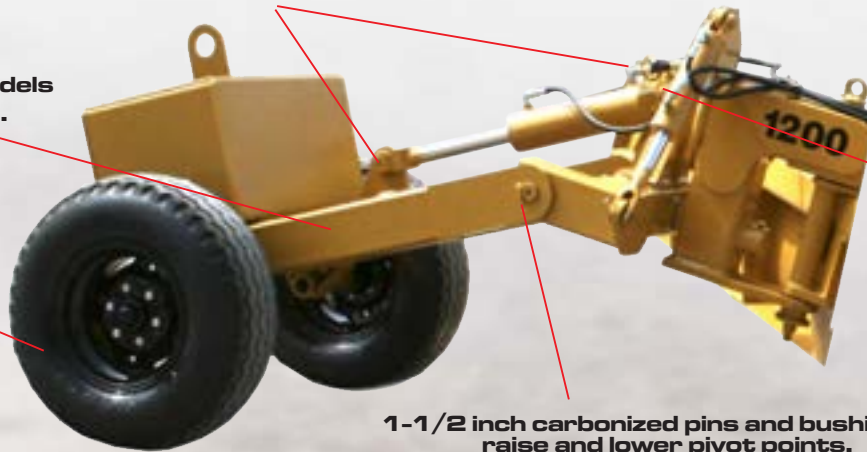


Hydraulic lock out for transportation.

1-1/2 inch carbonized pins and bushings at raise and lower pivot points.

Cylinder pins and bushings are carbonized and greasable.

Reinforcement plates are 3/8".

Articulated axel for the rear steer models 1000RS and 1200RS.

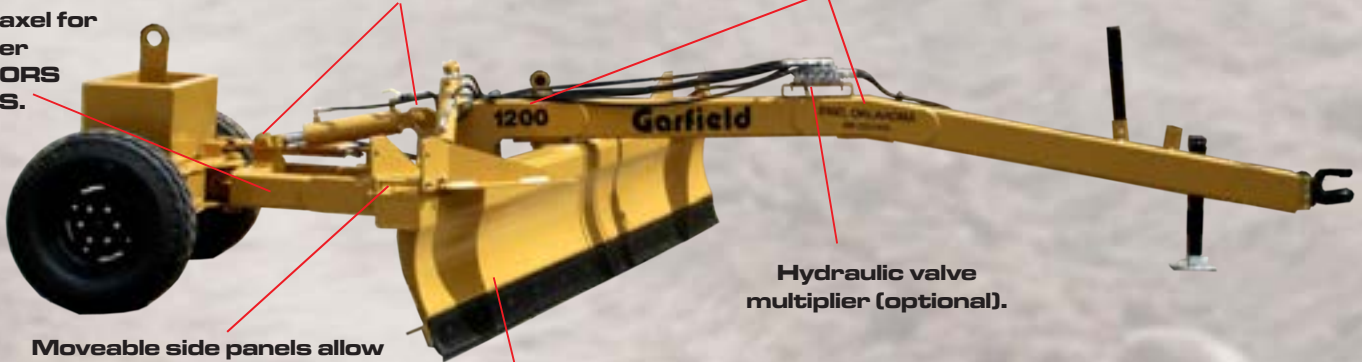


Moveable side panels allow for more scraping options.

Hydraulic valve multiplier (optional).

3/8 inch moldboard compared to the standard 5/16 inch.

Moldboard fits the contour of the blade allowing for maximum penetration, cutting, and rolling of the dirt rather than just dragging it.

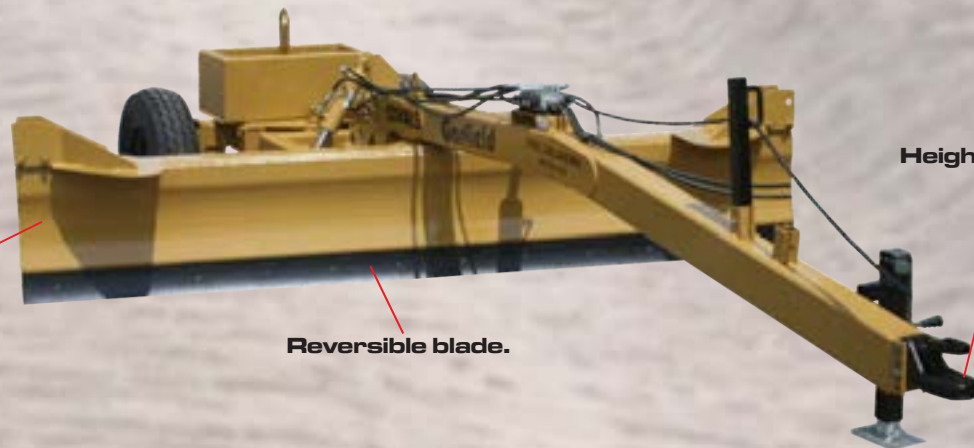

Reversible blade.

Height adjustable hitch.

SPECIFICATIONS		Model 1000	Model 1000RS	Model 1200	Model 1200RS
Width	(ft)	10	10	12	12
Angle	(°)	40	40	40	40
Height	(in)	24	24	24	24
Tilt Angle	(°)	15	15	15	15
Clearance	(in)	17	17	17	17
Tires		11Lx15	11L15	11L15	11L15
Weight	(lbs)	2612	2612	2800	2800
Length	(ft)	19' 6"	19' 6"	19' 6"	19' 6"
HP required (4WD)	(hp)	70-125	70-125	70-125	70-125

Contact your Garfield dealer and to find out about available options.