

GRADER BLADE



**Models 1400, 1400RS,
1600, 1600RS**


**Grader Blade available in
Straight or Rear Steer models**



Direct response system on raise and lower cylinder instead of old style double knuckle system.

Straight axel for models 1400 and 1600.

26 ply tires.

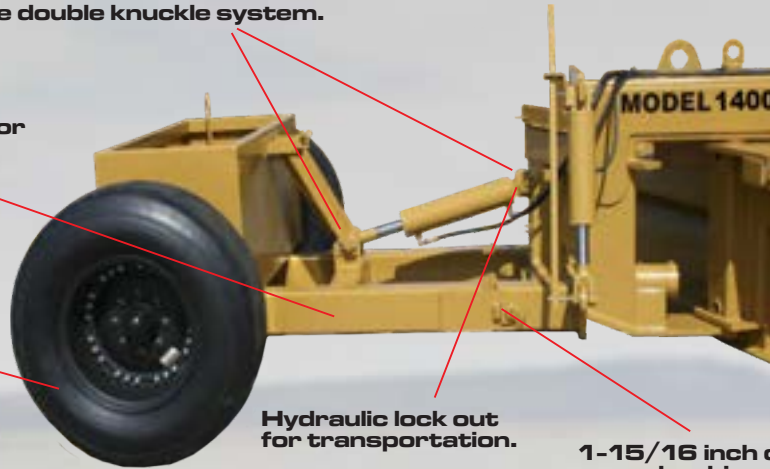


Hydraulic lock out for transportation.

1-15/16 inch carbonized pins and bushings at raise and lower pivot points.

Cylinder pins are 1.5in greasable carbonized pins and bushings instead of the standard 1 in cylinder pins.

Reinforcement plates are 1/2" compared to the standard 3/8".

Articulated axel for the rear steer models 1400RS and 1600RS.

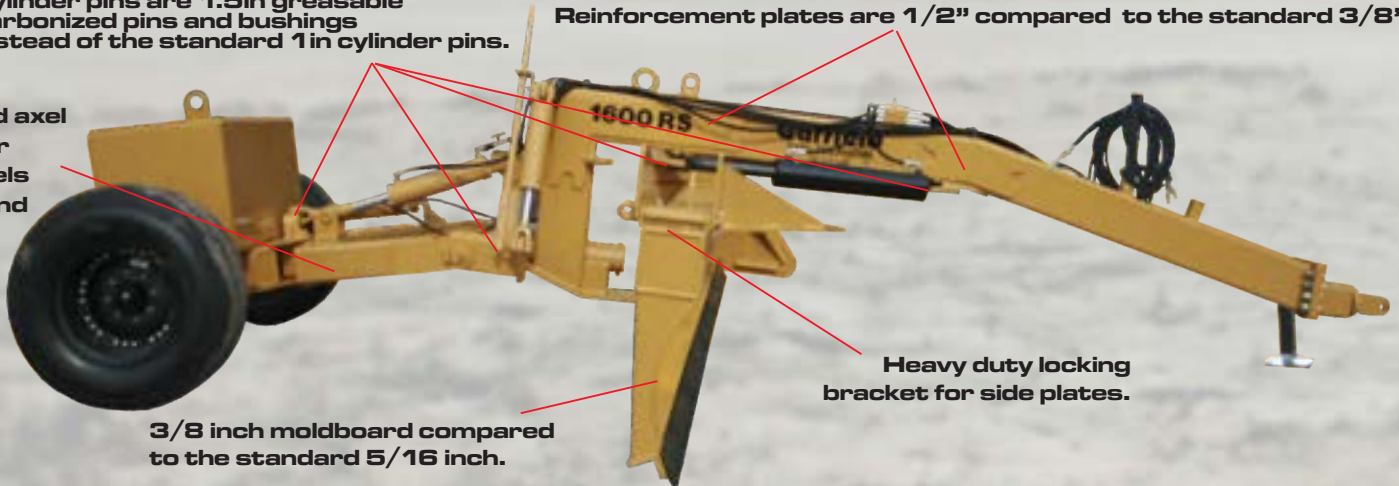

3/8 inch moldboard compared to the standard 5/16 inch.

Heavy duty locking bracket for side plates.

Moldboard fits the contour of the blade allowing for maximum penetration, cutting, and rolling of the dirt rather than just dragging it.



Height adjustable hitch.

Reversible blade.

| SPECIFICATIONS | | Model 1400 | Model 1400RS | Model 1600 | Model 1600RS |
|-------------------|-------|------------|--------------|------------|--------------|
| Width | (ft) | 14 | 14 | 16 | 16 |
| Angle | (°) | 45 | 45 | 45 | 45 |
| Height | (in) | 33 | 33 | 33 | 33 |
| Tilt Angle | (°) | 15 | 15 | 15 | 15 |
| Clearance | (in) | 30 | 30 | 30 | 30 |
| Tires | | 40x14.5x19 | 40x14.5x19 | 40x14.5x19 | 40x14.5x19 |
| Weight | (lbs) | 5840 | 5840 | 6027 | 6027 |
| Length | (ft) | 21' 5" | 21' 5" | 21' 5" | 21' 5" |
| HP required (4WD) | (hp) | 120-400 | 120-400 | 120-400 | 120-400 |